


120A and 120B Series

Fuel Filter/Water Separators

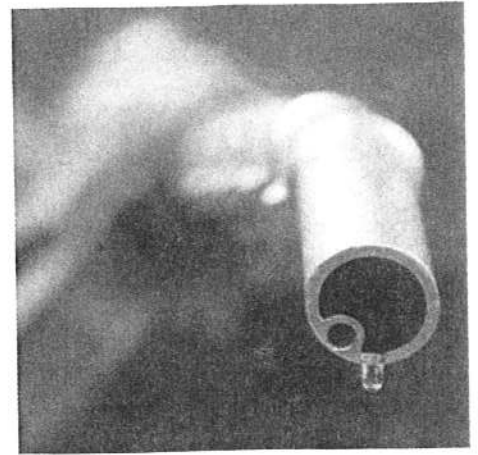

Instruction Part Number 10219 Rev B

Overview:

120A and 120B fuel filter/water separators are designed to be installed on the suction side of the fuel system with maximum flow capacities of 15 and 20 gallons per hour (GPH) respectively. The compact size and 4-port versatility make the 120 series a very popular small filter for many applications. Servicing is simplified by the self-venting bowl drain and spin-on filter.



Contact Information: Product Features:

Parker Hannifin Corporation
Racor Division
P.O. Box 3208
3400 Finch Road
Modesto, CA 95353

phone 800 344 3286
209 521 7860
fax 209 529 3278
racor@parker.com

www.parker.com/racor

- Removes 99% of free water
- Available with 2, 10, or 30 micron Aquabloc®II media
- Up to 20 GPH (75 LPH) flow rate (depending on model)
- Optional in-bowl water probe available
- 4-port, die-cast aluminum mounting head with 1/4"-18 NPTF threads



ENGINEERING YOUR SUCCESS.